



GLACO

SPACER TAPE

SGU | DGU

PRECISION. PERFORMANCE. PERFECTION.




FETURES

- PU Foam - open-cell structure
- Optimized silicone curing
- Temperature resistance from -50°C to +70°C
- High tack adhesive with excellent chemical resistance
- Low water absorption
- Sizes available : 3.2 mm, 6.4 mm, 8 mm, 9.5 mm

APPLICATION

Two- or four-sided structural glazing system

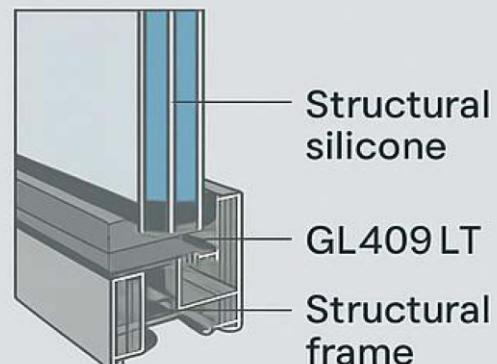

GLACO

GL409LT SERIES

TECHNICAL DATA SHEET

Property	Unit	Test Method	Values
Density	kg/m3	ASTM D1667	355
Hardness	Shore A	ASTM D2240	30
Force to Compress 10%	psi (kPa)	ASTM D1667	16 (108)
Shear Adhesion	psi (kPa)	ASTM D412	31 (208)
Static Shear Adhesion	Hours	ASTM D3654	2100+
Tensile	psi (kPa)	ASTM D412	129.075 (895)
Elongation	%	ASTM D412	85.2
Thermal Conductivity	W/m°C	ASTM C518	0.08
Migration Staining (200 hrs UV)	-	ASTM D925	No Staining
Recommended Service Temp.	C	-	-40 to 85
Shelf Life	months	-	24

GLACO GL409LT Series spacer tapes are engineered for high-performance facade applications that demand durability, adhesion, and temperature resistance. Designed to rival leading international brands, GL409LT delivers an optimal balance of compression strength, elongation, and thermal conductivity. With a 24-month shelf life and compatibility across a wide range of substrates, it is ideal for glazing, curtain wall systems, and structural bonding applications.

Note: The values above are typical and should not be considered specification limits. Users are advised to test the product in their own applications to determine suitability and performance.

STORAGE & HANDLING

Store in the original packaging, away from direct sunlight, moisture, and extreme temperatures. Ideal storage conditions: 21 C (70 F) and 50% RH. Avoid stacking heavy objects on rolls.

APPLICATION GUIDELINES

Ensure surfaces are clean and dry. Wipe with isopropyl alcohol and allow it to evaporate before application. Apply uniform pressure of 15 psi (103 kPa) for optimum adhesion.


SAFETY INFORMATION

Non-toxic under normal handling. Wear gloves as recommended. Refer to the product's SDS for detailed safety information.



GLOBAL PRESENCE

We have established a strong global presence with sales and distribution networks spanning across multiple countries.

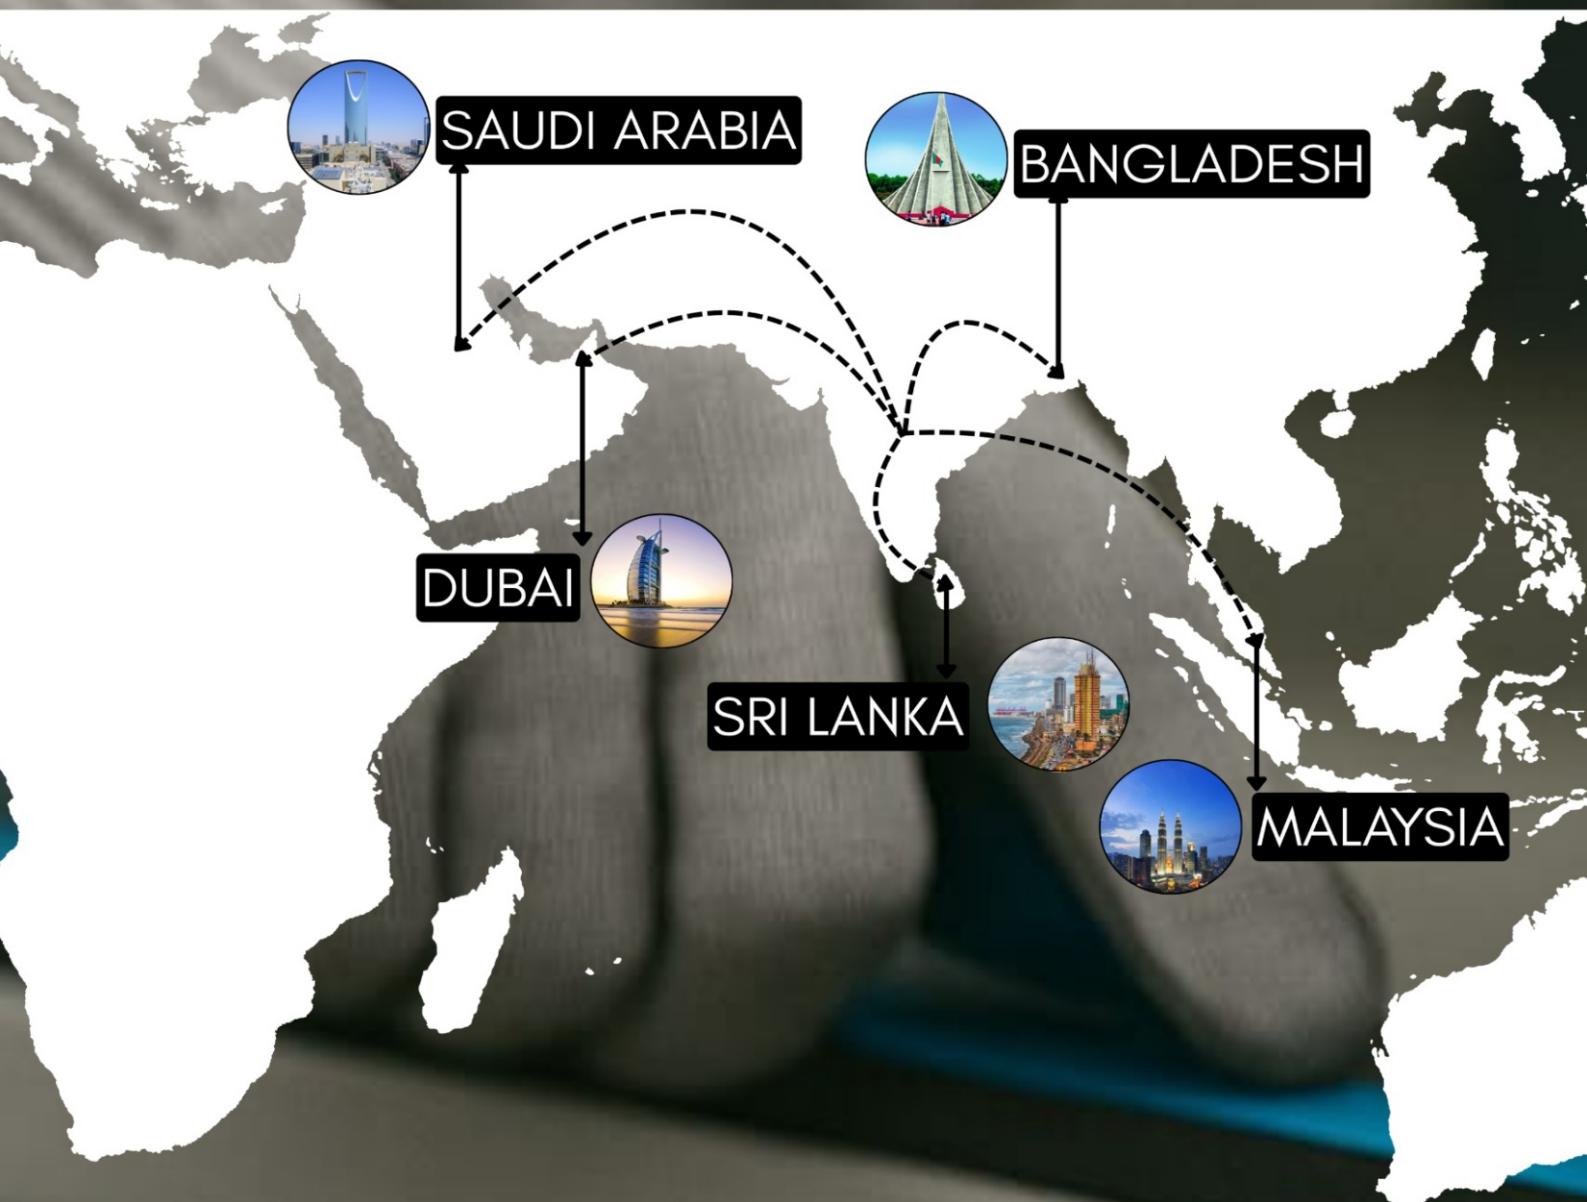

CONTACT US

 www.seaontapes.com

 +91 984 984 0990

 info@seaontapes.com

 1st Floor, Devi
Residency, Telecom Colony,
Gachibowli - 500032, Telangana, INDIA.

VISIT US

